

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
25 March 2004 (25.03.2004)

PCT

(10) International Publication Number
WO 2004/025642 A1

(51) International Patent Classification⁷: G11B 17/028,
17/32, 17/34

F-75008 Paris (FR). NATARAJAN, Ramasubramanian
[IN/FR]; 156 Bd Haussmann, F-75008 Paris (FR).

(21) International Application Number:
PCT/IB2003/003836

(74) Agent: CHAFFRAIX, Jean; Société Civile SPID, 156
Boulevard Haussmann, F-75008 Paris (FR).

(22) International Filing Date: 27 August 2003 (27.08.2003)

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English
(26) Publication Language: English
(30) Priority Data:
02292224.9 11 September 2002 (11.09.2002) EP

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

Published:
— with international search report

[Continued on next page]

(54) Title: APPARATUS FOR TILT CORRECTION OF AN INFORMATION CARRIER

APP

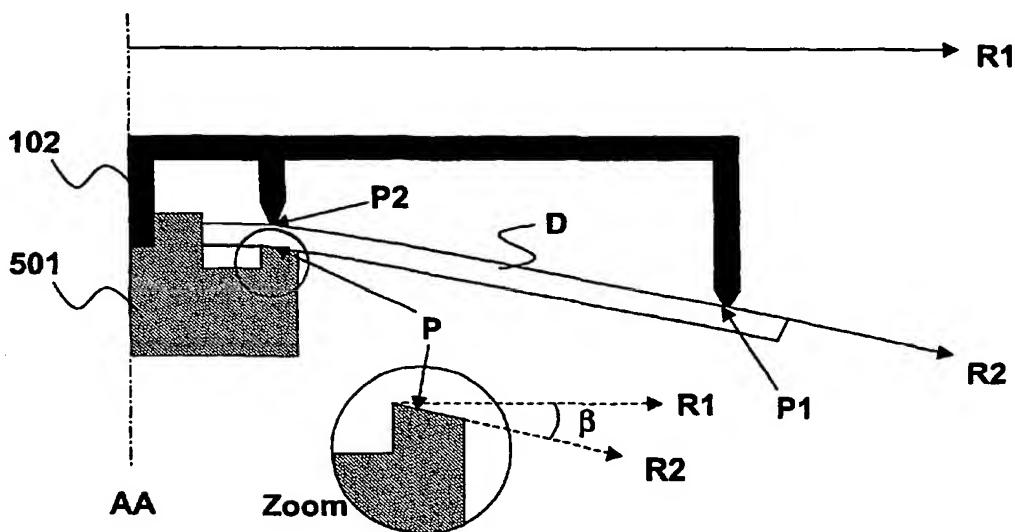

WO 2004/025642 A1

(57) Abstract: The invention relates to an apparatus for reading or writing information on a circular information carrier (D) having a periphery, said apparatus comprising a turntable (501) for clamping and rotating said information carrier (D), said information carrier (D) having an initial tilt from the radial direction of the turntable. The apparatus comprises additional means for applying an end load at the periphery of said information carrier, so as to apply a tilt of known value to said information carrier with respect to the radial direction of the turntable (501), said known value being larger than said initial tilt. The clamping surface of the turntable (501) may be tilted appropriately.